




ELECTRICAL SPECIFICATIONS

Frequency Range 4.9 - 5.8 GHz
Gain 24 dBi
VSWR 2.0
Impedance 50 $\Omega \pm 5 \Omega$
Polarization Vertical
Max. Input Power 10 Watts
Beamwidth H: 11.4° / **E:** 10.6°


MECHANICAL SPECIFICATIONS

Connector N-Female
Operating Temperature -22° ~ +140° F
 -30° ~ +60° C
Material: White Radome: ABS
Mount: Zinc Alloy
Dimensions (L x W x D) 16.25 x 14.6 x 1.2 in
Weight 3.0 lbs (1.3 kg)


RETURN LOSS

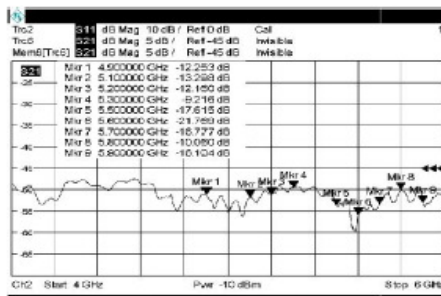

SWR

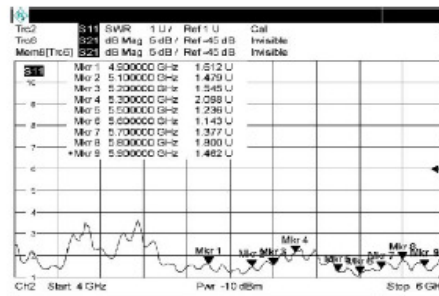

H PLANE

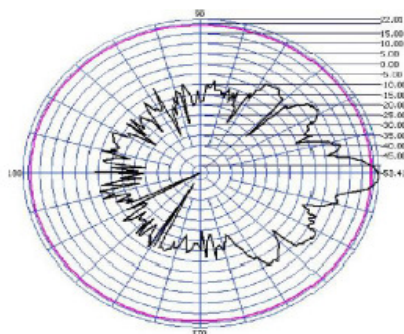

E PLANE

